



Precision Triaxial Fluxgate Magnetometer FGM-301

Description:

The FGM-301 is the best product for measuring DC and low frequency magnetic fields in three dimensions. This is a compact magnetic sensing device suitable for a wide variety of magnetic field measurement applications. Being an analog sensor, the FGM-301 provides high resolution and low signal delay. This product is far more stable and linear than magneto-resistive and magneto-inductive magnetometers.



Watson Industries has been developing state-of-the-art fluxgate magnetometers for almost thirty years to provide the FGM-301. As a result, this magnetometer is relied on for precision measurements from pole to pole in very critical projects.

Watson Magnetometer features:

- High Accuracy
- High Resolution
- High Reliability
- Low Noise
- Low Power
- Small Size and Weight
- Two Year Warranty
- Engineering Support

Applications:

- Navigation systems
- Magnetic field measurements
- Geological mapping
- Precision heading reference
- Solar Storm Monitoring

Options:

Custom Voltage inputs and/or outputs, calibration and remote (electronics separated from sensor).



Watson Industries, Inc.

3035 Melby Street Eau Claire, Wisconsin 54703 U.S.A
Phone: +1 (715) 839-0628 Fax: +1 (715) 839-8248
e-mail: support@watson-gyro.com Website: www.watson-gyro.com

FGM-301 Specifications

Magnetic

Range: X, Y, Z	± 700 mGauss	$\pm 70,000$ nTesla
Scale Factor:	± 200 mGauss/V	
Scale Factor Accuracy:	2%	
Scale Factor Matching between Axes:	$< \pm 0.2\%$	
Scale Factor Temperature Coefficient:	± 100 ppm per $^{\circ}\text{C}$	Typical
Bias:	$< \pm 5$ mGauss	
Non-Linearity:	$< \pm 0.01\%$	
Bandwidth:	30 Hz	
Noise:	< 0.3 mGauss rms (Typical)	< 10 uGauss in 1 Hz Bandwidth
Output Ripple:	< 0.2 mGauss P-P	

Environmental

Temperature: Operating	-50°C to $+80^{\circ}\text{C}$	
Temperature: Storage	-50°C to $+80^{\circ}\text{C}$	
Vibration: Operating	3g rms	100 Hz to 1 kHz
Vibration: Survival	4g rms	100 Hz to 1 kHz
Shock: Survival	200g	10ms $\frac{1}{2}$ sine wave

Electrical


Input Power:	6 to 16 VDC	0.4W
Input Current:	35mA	
Analog Output	± 3.5 VDC	
Output Impedance	1000 Ohm	

Physical

Axis Alignment:	$< 0.3^{\circ}$	
Size: Including Mounting Flanges	1.0"W x 4.18"L x 1.0"H	2.5 x 10.6 x 2.5 (cm)
Weight:	3.1oz (0.2lb)	90g (0.1kg)
Connection:	9 pin male "D" subminiature	
Life:	$> 50,000$ Hours MTBF	

- Specifications are subject to change without notice.
- This product may be subject to export restrictions. Please consult the factory.

Dimensions:

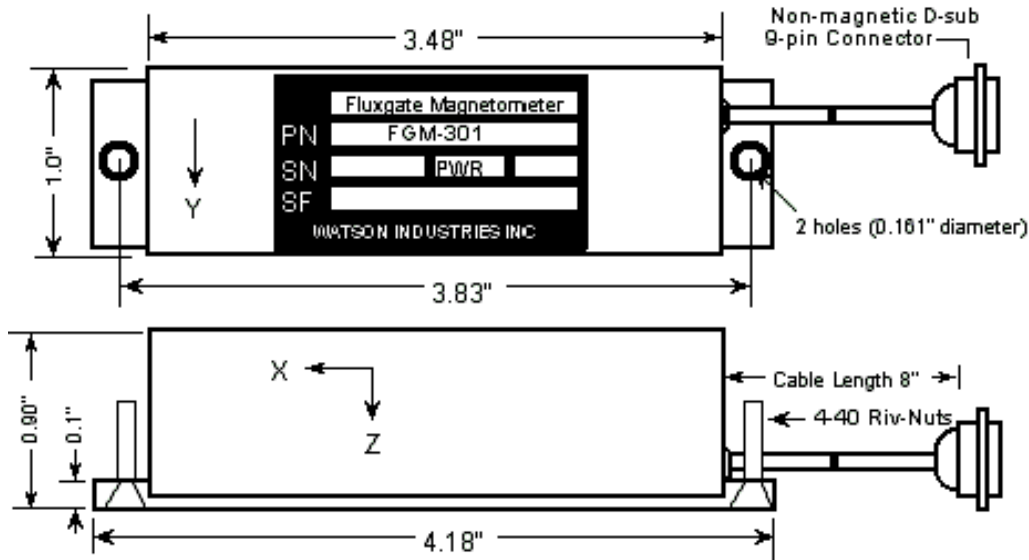

06/11 DAO



Watson Industries, Inc.

3035 Melby Street Eau Claire, Wisconsin 54703 U.S.A
 Phone: +1 (715) 839-0628 Fax: +1 (715) 839-8248
 e-mail: support@watson-gyro.com Website: www.watson-gyro.com